


The LX Series Combo is provided with two 6 VDC, 5.4 watt (S66) lamp heads. Additional heads are available from the remote lamp head section of the catalog.

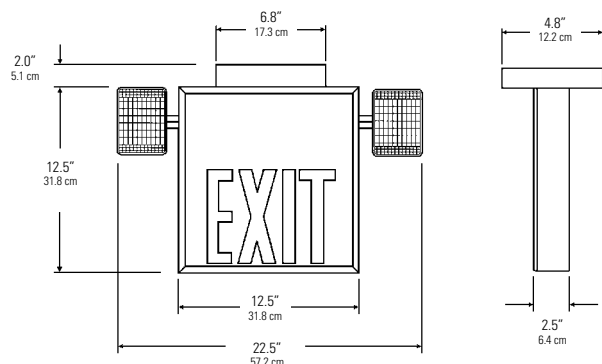

Complete Fixture consists of base exit sign. Select options and accessories below.

## How to Specify:

LX				W	2H
<b>SERIES</b>	<b>WATTAGE</b>	<b># OF FACES</b>	<b>LETTER COLOR</b>	<b>HOUSING COLOR</b>	<b>LAMP HEADS</b>
LX = LX Series Heavy Duty Steel Combination Exit/Emergency Unit	12L = 12 Watt Capacity 30L = 30 Watt Capacity	1 = Single 2 = Double U = Universal	R = Red G = Green	W = White	2H = Two S66, 5.4 Watt Lamp Heads

## Features

- Illumination:** Illumination is accomplished with long lasting, high output Light Emitting Diodes (LEDs). LEDs and support electronics have an expected life of 25 years.
- Housing:** Constructed of 20 gauge steel. Suitable for ceiling, end and surface mount applications. Includes universal stencil with field selectable chevrons. White housing is standard.
- Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Emergency operation version includes a charging system complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- Battery:** Maintenance free, sealed lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C).
- Self-Diagnostics:** Self-diagnostics option includes a fault indicator LED and microprocessor circuitry that automatically indicates battery and charger status. An automatic monthly test assists user in meeting requirements of NFPA 31-1.
- Input Power Requirements:**
  - Red = .090A (120 VAC)
  - .039A (277 VAC)
  - Green = .090A (120 VAC)
  - .039A (277 VAC)
- Warranty:** Electronics: 3 years; Battery: 1 year full, 4 years pro-rata

## Code Compliance

UL 924 listed.  
National Electrical Code (NEC), NFPA70 and NFPA101 life safety codes; and OSHA safety code illumination standards.

## Options

**2CKT1** = Two circuit, 120 VAC  
**2CKT2** = Two circuit, 277 VAC  
**SD** = Self-Diagnostics (Not suitable for wall mount)  
**BF** = Buzzer/Flasher (emergency operation only)\*  
**BZ** = Audible Buzzer (emergency operation only)\*  
**EX** = Special Input Transformer (specify voltage & frequency)  
**FA** = 24V Fire Alarm Interface\*  
**FL** = Emergency Flasher  
**SW** = Special Wording (per face charge, one-time artwork setup charge will apply)

\* Not available with self-diagnostics (SD) option

## Accessories

**XCKITW** = Canopy Kit, white finish  
**DCKCE06** = DC Conversion Kit, 6 VDC, 5.4 watt lamps  
**DCKCE22** = DC Conversion Kit, 12 VDC, 5.5 watt lamps  
**WG** = Wireguard for Combination Exit/Emergency

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • D0308